

ALTO AFINAJE ELECTROLITICO HIGHT ELECTROLITIC REFINING

PARA ORO - FOR GOLD


Capacidad 9,5 litros de electrolito
conteniendo 80 gr.de oro por litro.
Producción aprox. 60 grs. hora con
pureza .9999, partiendo de un título
mínimo de .990 a .995.

*9,5 liters capacity of electrolite con-
taining 80 grammes of gold per liter.
Productions about 60 grammes per
hour. Purify .9999, starting from .990
to .995 minimum.*



Cod. RT011920

Lingotera especial R-10
Cod. RT011940

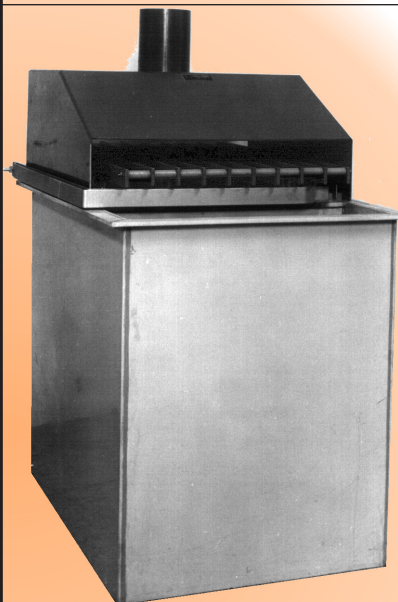

PARA PLATA - FOR SILVER

Permite afinar plata a pureza 999.9 milésimas,
partiendo de 900/950.

Producción: 1 Kg./hora
(24 kgs./día).

Capacidad de 250 lts. conteniendo 50 grs.
nitrato de plata por lt.

Rectificador necesario: 300 Amp. 0-10 V.

*Allows refining silver to 999.9 purity, starting
from 900/950.*

*Production: 1 kg./hour.
(24 kgs./day).*

*250 lt. capacity, containing 50 gr. silver nitrate
per lt.*

Rectifier required: 300 Amp. 0-10 V.


Dimens. 72x112x130
Kgs. 80/140

Cod. RT011750

Lingotera especial R-250
Cod. RT011800

CUBA AFINAJE PLATA REFINING TANK FOR SILVER


MOD. RH150
COD. RT011740

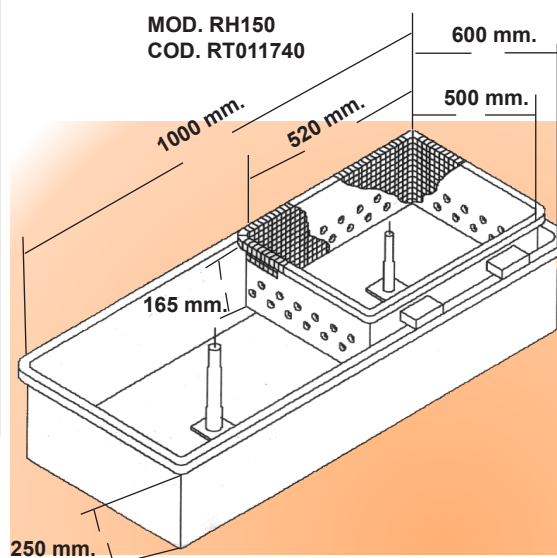

CORELESS

Sistema para eliminar
el alma de cobre en
joyería hueca.

System to remove
copper core from
hollow jewellery



Rectificador necesario
Rectifier required

100 amp. 0-10V

Bolsa - Bag
Dimens. 165x520x500

Cod. RT011790



VENTAJAS DEL SISTEMA:

- No produce humos.
- Trabaja a temperatura ambiente.
- No afecta al quilataje del oro, ni a la solidez o estructura de la pieza.
- Disuelve el 100% del cobre al que tenga acceso directo.
- En casos muy rebeldes, minimiza el ataque con nítrico.
- Capacidad de absorción de cobre: 24 gramos por litro aprox.

Dimens. 46x31x38 cms.
Cod. RT050500 (CAP.25 LTS.)

SYSTEM ADVANTAGES:

- No smokes.
- Work at room temperature.
- Does not affect karat or structure of pieces.
- Dissolves all copper with direct acces.
- Miminizes nitric acid treatment when copper has not direct acces.
- Copper absorbtion capacity: 24 grammes per liter.

HISPANA

de Maquinaria, S.A.

Tel. +34 93 3091707 Fax. + 34 93 3090702
e-mail: hispana@hispanaspain.com
internet: http://www.hispanaspain.com
C/ Can Cuiàs, 24-26 - Pol.Ind. Can Cuiàs, nave 20/1
Montcada i Reixac 08110 - Barcelona - España (Spain)